

# Globe at home Prepaid wifi ZLT S10G V2.10.1 Full Debrand Tutorial


## 1. Check if your modem is v2.10.1 firmware version

The screenshot shows the 'Globe AT HOME' web interface. At the top, there's a navigation bar with 'Home', 'Quick Settings', 'Device Settings', 'SMS', 'Phonebook', 'Firewall', and 'System Settings'. The main content area is divided into three columns: 'Internet', 'Advanced Settings', and 'Home Network Settings'.  
- The 'Internet' column shows 'Internet Connection' is turned ON, IMEI (redacted), WAN Domain (globebroadband.net), WAN IP Address (10.60.98.234), and WAN IPv6 Address (--).  
- The 'Advanced Settings' column shows 'Firmware Version' as S10G\_2.10.1, RSRP(dBm) as -104, SINR as 11, Cell Id as 0242833-032, BAND as 41, PhysCellId as 106, and 'DHCP' settings with IP Address 192.168.254.254 and DHCP IP Pool 192.168.254.100 - 192.168.254.200.  
- The 'Home Network Settings' column shows 'Wi-Fi' settings: Network Name(SSID) 'GlobeAtHome\_33C1E', Max Access Number 16, Wi-Fi MAC 'D8:D8:66:33:3C:1E', LAN MAC 'D8:D8:66:CC:3C:1E', and Channel Bandwidth '20MHz/40MHz'. A 'Restart Device' button is visible at the bottom of this section.


## 2. Download the ZLT S10G V10.0 zip File tapos extract. Tapos eto ang laman ng file.

The screenshot shows a mobile file manager interface. The top status bar displays the time as 12:58 and battery level at 48%. The navigation bar includes a home icon, a 'Local' folder icon, and a search icon. Below the navigation bar, a download progress bar shows 'Download > zlts10g2022 Andri... > zlts10g2022 Andri...' with a 90% completion indicator. The file list contains three items: 'at\_ctl' (unknown file type), 'zlt.php' (PHP file), and 'zlt.txt' (text file).

### 3. Open "AWebServer" App tapos start nyu service

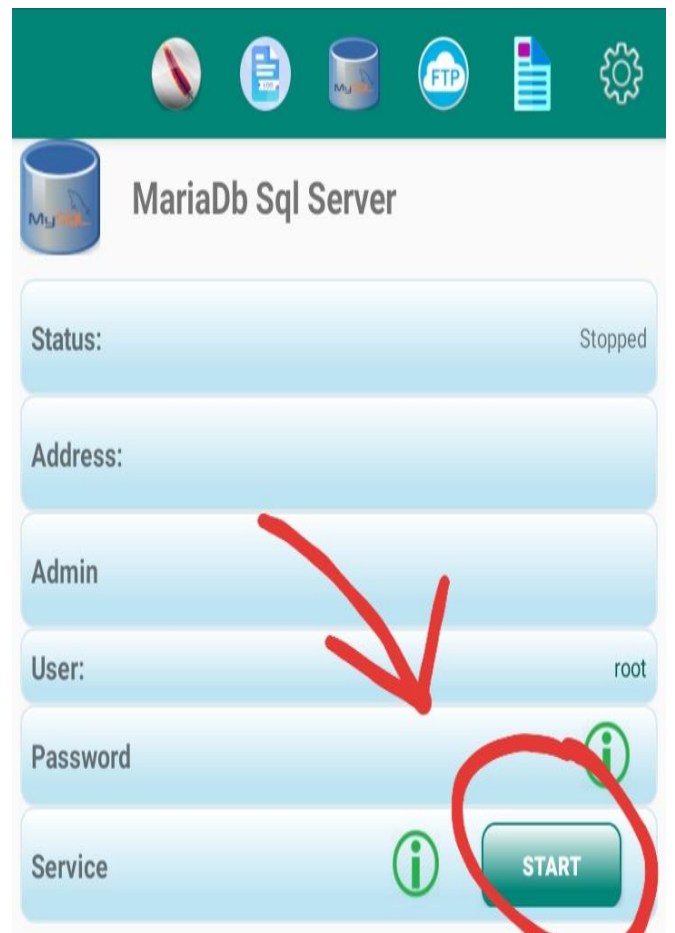


Tapos ganito ang resulta , Tandaan nyu yang ip nayan dahil yan ang gagamitin natin para sa file

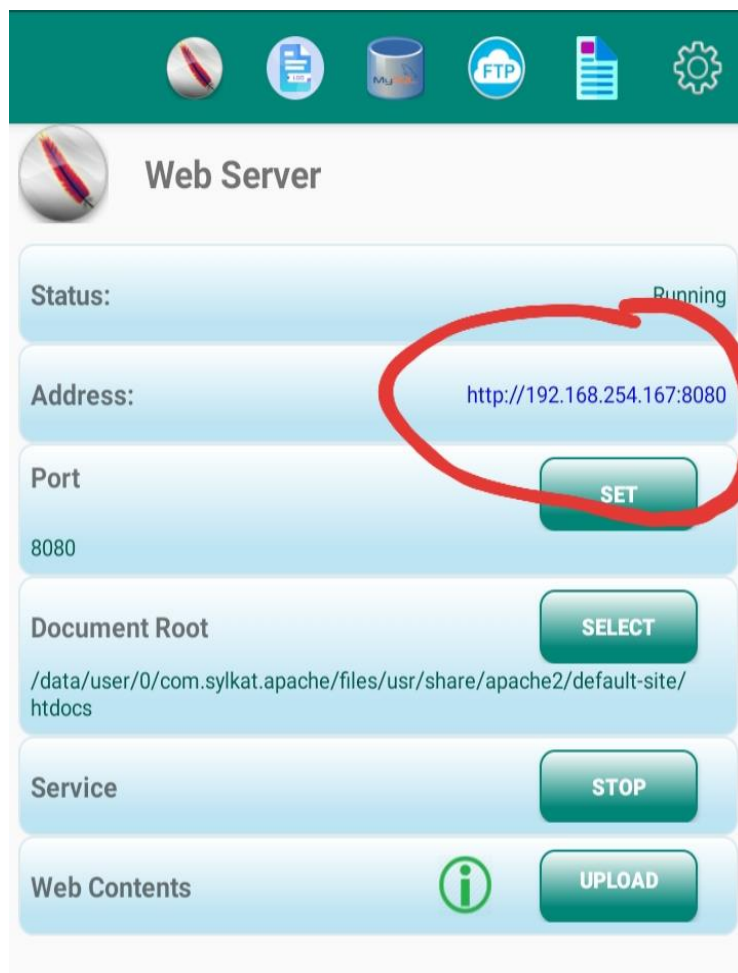


## 4. Open nyu ES FILE Explorer at hanapin nyu yung na download na files at I edit nyu yung mga IP

Etong dalawang file lang yung I edit natin

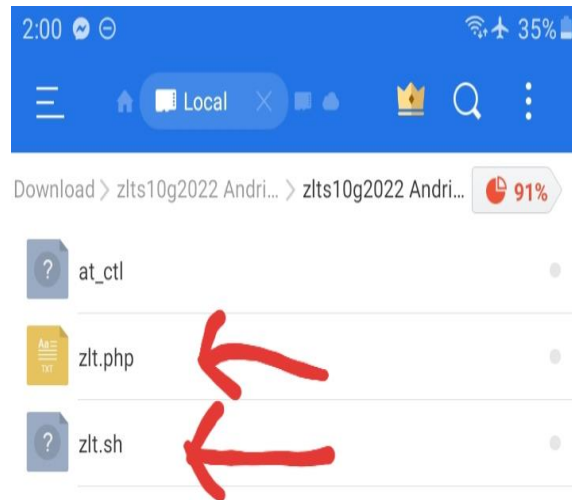


Tapos palitan nyu ng ip galing dun sa AWebServer

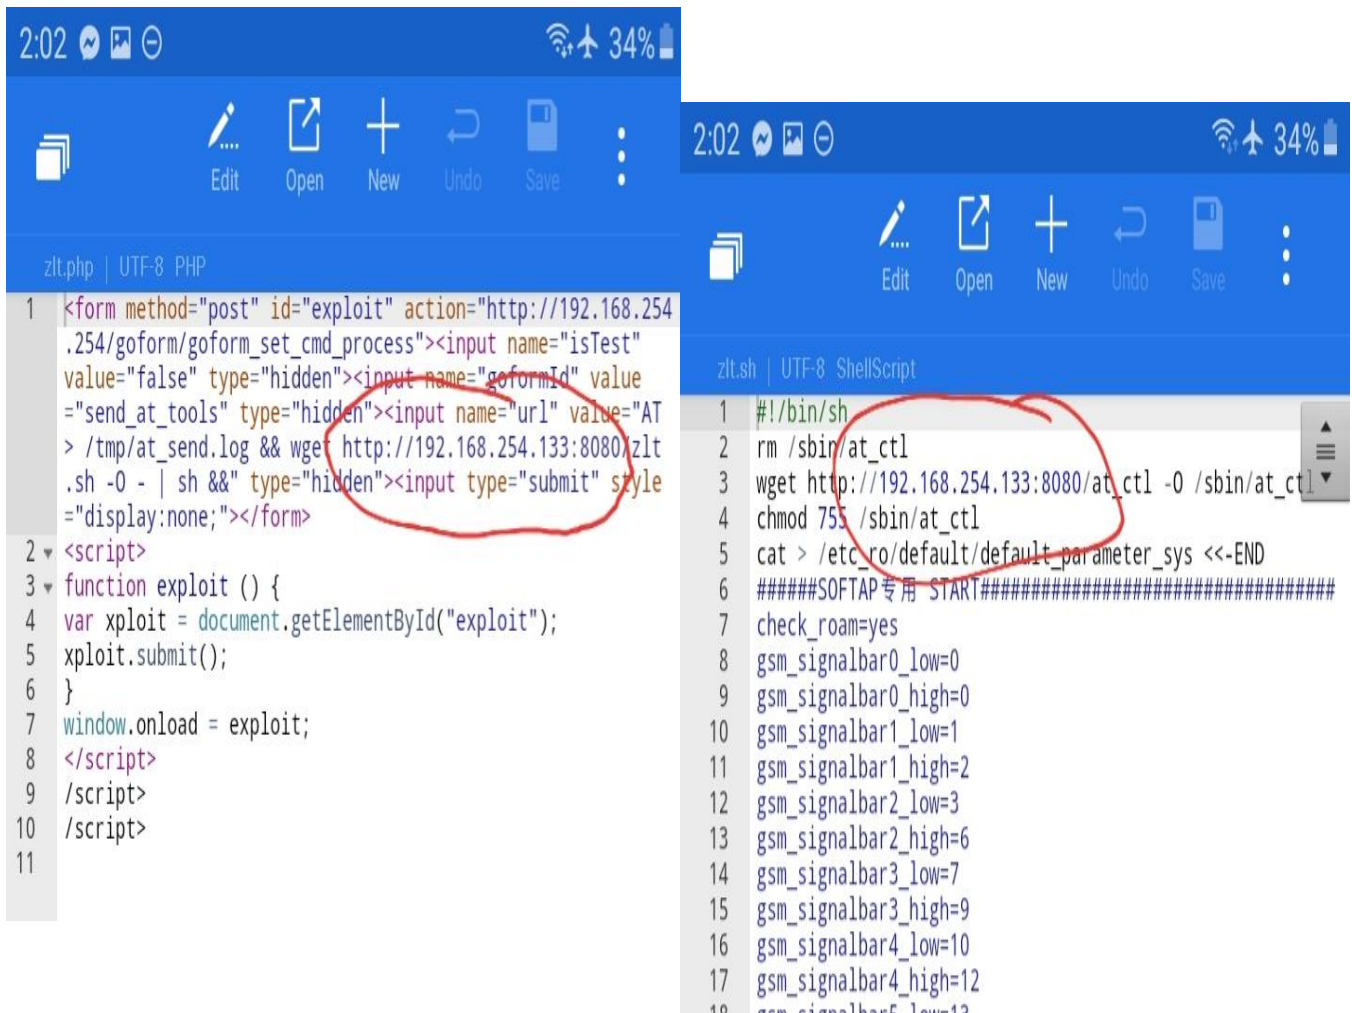

Then Save Nyu , make sure naka na apply yung pinalit nyo na ip para di magka conflict.

**5. (Upload Files ) balik kayu sa AWebServer app and make sure na running ang status nya tapos click nyu upload.**

**Upload nyu isa isa lang ,walang progress yan na magsasabi kung na upload na, automatic na upload yan pag click nyu ng file**

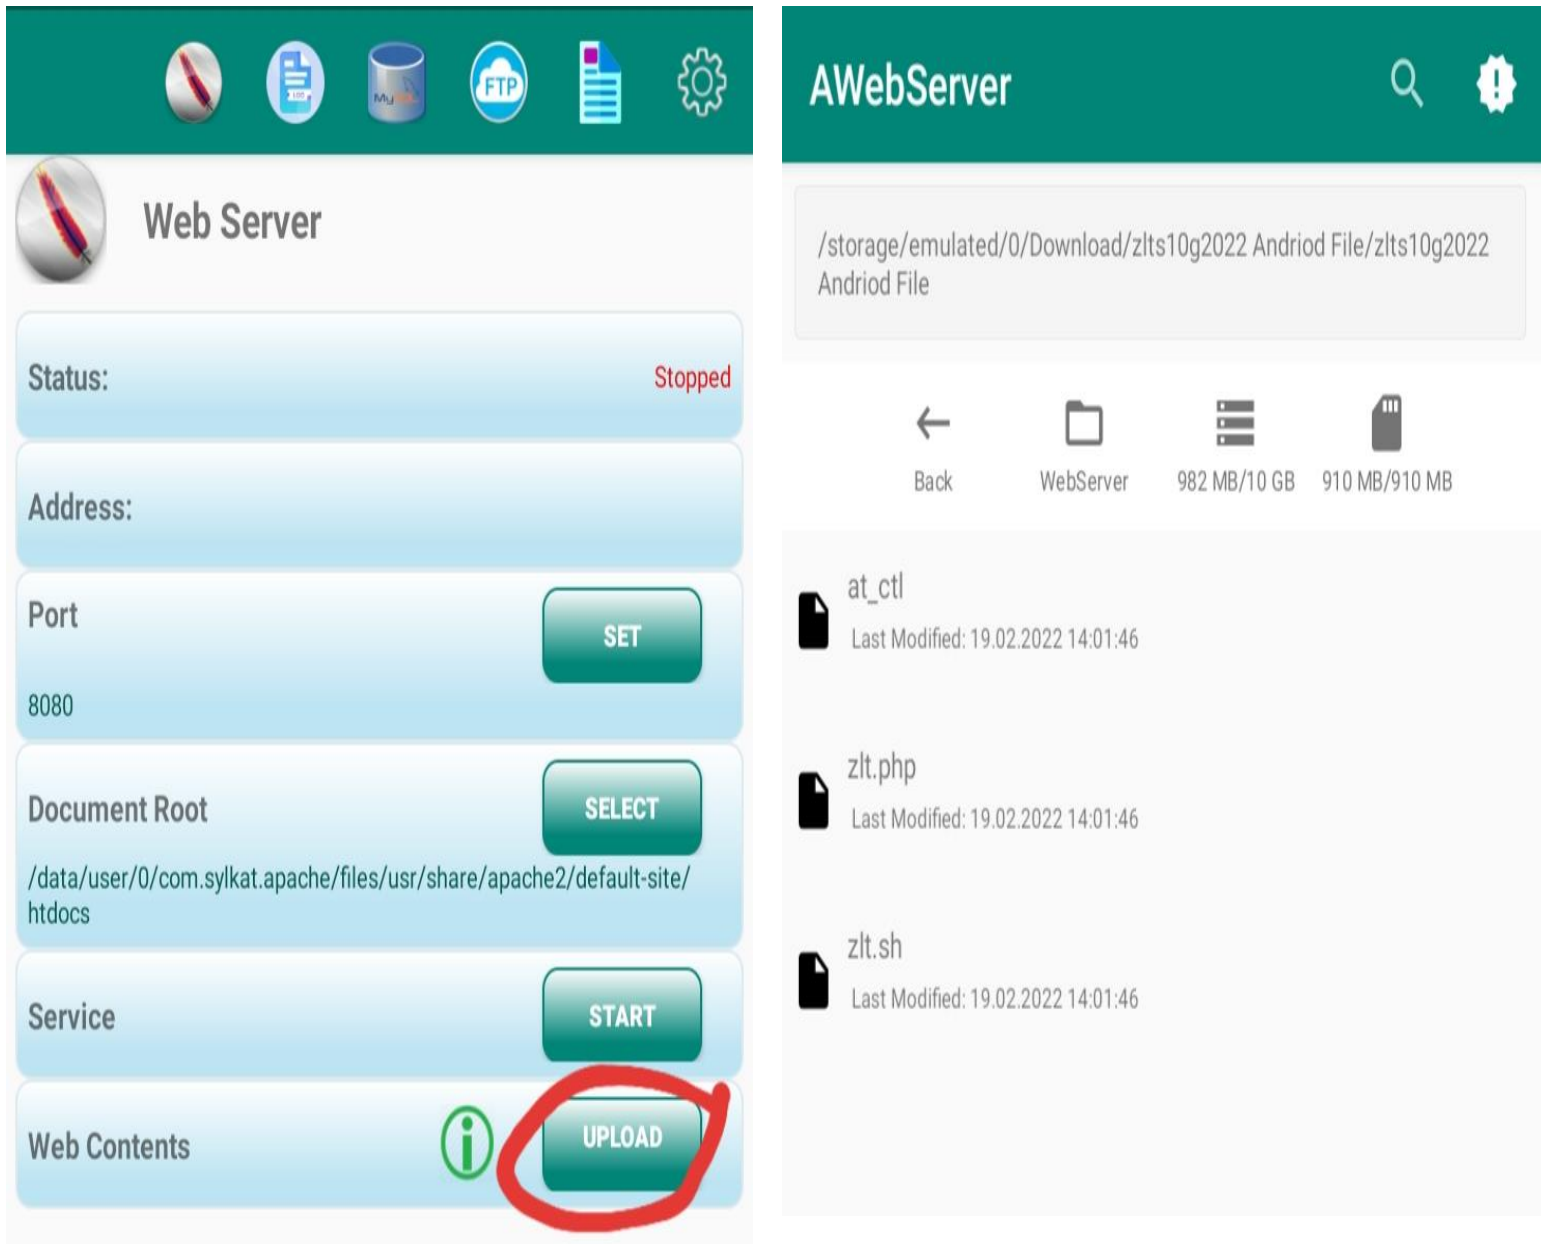

**Minimize nyu lang yung AWebServer wag nyu I stop yung service.**

## 6. (Flashing Files) Punta kayu sa chrome at log in nyu router nyu via 192.168.254.254

Make sure na naka log in kayu sa router

2:14 [YouTube] [Messages] [Notifications] [Battery]

192.168.254.254/index.html?t=86761467

Globe AT HOME LTE 51502 [Signal] [Globe] [Email] [Battery] [Wi-Fi]

Logout








Internet	Advanced	Home Network
<b>Internet Connection</b> <input checked="" type="checkbox"/> ON IMEI 860702046982138 IMSI 515025623728886 LAN Domain globebroadband.net WAN IP Address 10.60.98.234 WAN IPv6 Address --	<b>Firmware Version</b> S10G_2.10.1 <b>RSRP(dBm)</b> -104 <b>SINR</b> 11 <b>Cell Id</b> 0242833-032 <b>BAND</b> 41 <b>PhysCellId</b> 106	<b>Wi-Fi</b> 1 <b>Cable</b> 0
<b>Statistics</b>	<b>DHCP</b>	<b>Wi-Fi</b>
Used - Total -	<b>IP Address</b> 192.168.254.254 <b>DHCP IP Pool</b> 192.168.254.100 - 192.168.254.200	<b>Settings</b> <b>Network Name(SSID)</b> GlobeAtHome_33C1E <b>Max Access Number</b> 16 <b>Wi-Fi MAC</b> D8:D8:66:33:3C:1E <b>LAN MAC</b> D8:D8:66:CC:3C:1E <b>Channel Bandwidth</b> 20MHz/40MHz  <b>Restart Device</b>

Open new tab lang tapos I type mo sa address bar yung ip na galing sa AWebServer .

# Eto format 192.168.254.xxx/zlt.php?

2:48

28%

-  192.168.254.167:8080/zlt.php? 
-  192.168.254.167:8080/zlt.php?  
[192.168.254.167:8080/zlt.php?](#) 
-  192.168.254.167
-  192.168.254.167:8080  
[192.168.254.167:8080](#) 

**AND DONE !**

**PAG ETO RESULT CONGRATS OPENLINE NA ANG  
MODEM MO**

2:42

57%




 192.168.254.254/goform/goform\_set\_ci



Pero pag eto result nya meaning may mali sa procedure mo like

1. Hindi Ka naka log in sa admin panel ng modem bago nag flash
2. Hindi running ang status ng AWebServer Mo
3. May kulang sa naupload mo na files

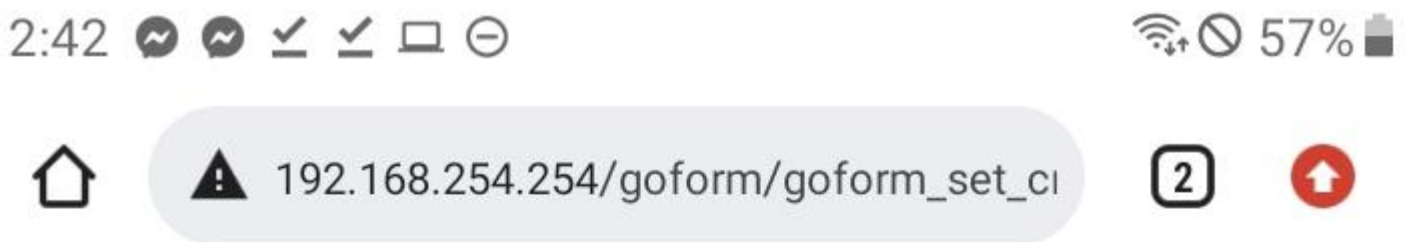

{"result": "failure"}

**Note : Reset Your modem after ma online**

**Sample snapshot of online modem:**

3:14 49%

192.168.254.254/index.html#index\_stati

ZTE中兴

Status	
Platform Version	V3E
IMEI	866702046982139
S/N	5106860702046982138
SIM Status	Normal
Network Mode	LTE
IPv4 Status	Connected
WAN IP Address	10.209.234.222
IPv4 DNS	121.54.70.156,121.54.70.155
Internet Usage	
Total Traffic	2.08 MB
Uplink Traffic	0.44 MB
Downlink Traffic	1.64 MB
Uplink Rate	0.0/s
Downlink Rate	4160/s
Run Time	00:00:57
LTE Signal Status	
PLMN	51503/51503
Service Status	Normal
PhysCellId	123
Cell Id	0152107207
RSRQ(dB)	-8
RSRP(dBm)	-75
SINR	21
Roaming	No
BAND	3
MCS	3
COI	4
RSSS(dBm)	-46
Antenna Status	
Antenna1	External
Antenna2	External

**Contact Me if may question kayu via my facebook profile**

**John Tiu - [Click Here](#)**

**Donation Kahit pang kape lang 😊**

**Paymaya – 09755256850**

**Coins.ph – [pjmartinez569@gmail.com](mailto:pjmartinez569@gmail.com)**

**Paypal- [jaspercatacutan3@gmail.com](mailto:jaspercatacutan3@gmail.com)**